



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

REC'D 04 OCT 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 23 September 2004

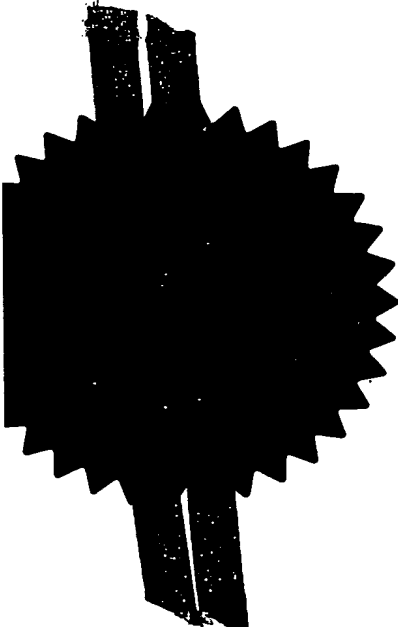

Patent 1977
(Rule 10)

23 SEP 2003

The Patent Office

23 SEP 03 08392137 0027767
P01/7706 0.00-0322224.7

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

QIP/P7286

2. Patent application number

(The Patent Office will fill in this part)

0322224.7

23 SEP 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

QINETIQ LIMITED

Registered Office 85 Buckingham Gate
London SW1E 6PD
United Kingdom

Patents ADP number (if you know it)

8183857001
GB

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Apparatus for establishing the positions of metal objects in an input stream

5. Name of your agent (if you have one)

Ian Michael Johnson

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

QINETIQ LIMITED
IP Formalities
A4 Bldg
Cody Technology Park
Ively Road
Farnborough
Hants GU14 0LX United Kingdom

Patents ADP number (if you know it)

81838573001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number or earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right if to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body. See note (d))

YES

Patents Form 1/77

For the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 15

Claim(s) 3

Abstract 1

Drawing(s) 7 + 7

9. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1


Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

1. I / We request the grant of a patent on the basis of this application.

Signature



I.M. Johnson, Agent for the Applicant

Date: 19.09.2003

2. Name and daytime telephone number of person to contact in the United Kingdom

Mrs Linda Bruckshaw 01252 392722

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent of the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) If you need help to fill in this form or have any questions, please contact the Patent Office on 0645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have attached 'Yes' Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

APPARATUS FOR ESTABLISHING THE POSITIONS OF METAL OBJECTS IN AN INPUT STREAM

The present invention relates to apparatus for establishing the positions metal
5 objects in a mixed input stream of both metal and non-metal objects, and
particularly (although not exclusively) to establishing the positions of metal objects
in a mixed-waste input stream. Mixed-waste streams are encountered, for
example, during reclamation of recyclable objects from unsorted household
waste.

10

The removal of metallic content in a waste stream and sorting between ferrous
and non-ferrous objects are important steps in the recovery of metals in material
reclamation facilities (MRFs).

15 In a known type of apparatus, establishment of the positions of metal objects in a
mixed input stream on a moving conveyor, and subsequent separation of the
metal objects, is achieved by use of one or more metal detectors to detect the
metal objects, and a rejection mechanism which receives signals from the one or
more metal detectors and effects separation in response to the signals. An
20 example is the apparatus disclosed in US Patent Number 4 541 530. Various
rejection mechanisms are known, for example air separators, flap gates, or
means to stop or reverse the conveyor to allow removal of detected metal objects.

Typically, a series of discrete metal detectors is arranged across the width of the
25 conveyor, and output signals from the metal detectors are processed to give
positional information on metal objects to be separated. Each detector has

associated with its processing circuitry to interpret its output and to provide control signals to a rejection mechanism. To efficiently and accurately establish the position of metal objects in a mixed input stream, a high linear density of detectors across the conveyor is required, and consequently a large number of detectors and a large amount of electronic hardware is needed in order to process output signals from each of the detectors because the effective detecting width of a single detector is limited. This is disadvantageous both in terms of cost and complexity.

10 It is an object of the invention to ameliorate the aforementioned problems.

According to a first aspect of the present invention, this object is achieved by apparatus according to claim 1 comprising a differential metal-detecting coil having a first coil portion wound in a first sense and a second coil portion of generally similar shape and size to the first, wound in a second sense opposite to the first sense, and conveying means for moving objects with respect to, and past, the differential metal-detecting coil in a plane and in a direction with unit vector \hat{a} , characterised in that the second coil portion is displaced from the first coil portion by a displacement \mathbf{B} having a component in the plane in a direction with unit vector \hat{b} , wherein $0 < \cos^{-1} \hat{a} \cdot \hat{b} < \pi/2$, and in that the apparatus further comprises analysing means for analysing the form of the output voltage of the coil as a function of time to establish the position of said metal objects in a direction \hat{c} in the plane, where \hat{c} is defined by $\hat{a} \cdot \hat{c} = 0$.

A metal object passing one coil portion of a differential metal-detecting coil will induce a signal in the coil that is opposite in polarity to that produced if the metal had passed the other coil portion. A metal object passing both coil portions induces an EMF which changes polarity as it passes the coil. Analysis of the form
 5 of the signal induced in a given metal detector coil as a function of time when a metal object passes the detector therefore provides positional information relating to the metal object; such information may then be used in extracting the metal object from the waste stream, if required. A single differential metal detector coil is thus effectively used as two distinct receivers by displacing the coil portions of
 10 each coil as described above.

The invention provides the advantage that the detecting width of a single receiver coil is increased without detriment to the quality of positional information generated by the coil, and hence in a system of the invention having a linear array
 15 of receiver coils, the number of such coils is reduced compared to prior art apparatus. Furthermore the amount of electronic processing hardware associated with the array is reduced compared to prior art apparatus, due to the reduced number of receiver coils.

20 Preferably, $\mathbf{B} \cdot \hat{\mathbf{a}} \geq t$, where t is the dimension of a coil portion in the $\hat{\mathbf{a}}$ direction, and $\frac{s}{2} \leq \mathbf{B} \cdot \hat{\mathbf{c}} \leq s$, where s is the dimension of a coil portion in a direction with unit vector $\hat{\mathbf{c}}$ defined by $\hat{\mathbf{a}} \cdot \hat{\mathbf{c}} = 0$, because this geometry provides a significant improvement in the detecting width of receiver coil, whilst at the same time providing for unambiguous signals to be induced in the receiver coils. Also, this
 25 avoids overlapping coil portions.

Conveniently, the analysing means comprises means for identifying voltages of different polarities, and for ascribing voltages of a first polarity to one coil portion and voltages of a second polarity, opposite to the first, to the other coil portion.

- 5 Preferably the apparatus comprises a plurality of such differential metal-detecting coils arranged in a linear array substantially in the \hat{c} direction, thus allowing an input stream of substantial width to be processed.

The apparatus may incorporate a transmitter coil, if appropriate (e.g. non-ferrous
10 objects must have eddy currents induced in them order that they may be detected by a receiver coil). If a transmitter coil is required, preferably a single coil is arranged around the one or more metal-detecting receiver coils, as this provides a simpler arrangement than is found in prior art systems, which employ a separate transmitter coils for each receiver coil. Multiple transmitter coils are difficult to
15 synchronise in practice.

Conveniently, the differential metal-detecting coils may be formed by metal tracks on individual printed circuits boards (PCBs). The differential metal-detecting coils may also be formed on a single PCB. A single PCB may support both the
20 differential metal-detecting coils and a single transmitter coil, and also electronic hardware for analysing signals from the transmitter coils.

A second aspect of the invention provides a metal-detector array comprising a plurality of differential metal-detecting coils, the array extending in a direction with
25 unit vector \hat{x} , and each metal-detecting coil having a first coil portion (15) wound

in a first sense and a second coil portion (16) of generally similar shape and size to the first, wound in a second sense opposite to the first sense, characterised in that, in at least one metal-detecting coil, the second coil portion thereof is displaced from the first coil portion thereof by a displacement \mathbf{B} such that the two

5 coil portions are substantially in the same plane and $0 < \cos^{-1} \hat{\mathbf{b}} \cdot \hat{\mathbf{x}} < \pi/2$ where $\hat{\mathbf{b}}$ is a unit vector defined by $\mathbf{B} \cdot \hat{\mathbf{b}} = |\mathbf{B}|$, and in that the system further comprises, in respect of that or those metal-detecting coil or coils, analysing means for analysing the form of the output voltage of those coil or coils as a function of time to establish the position, along the direction $\hat{\mathbf{x}}$, of metal objects when said objects

10 are moving past the array substantially in a direction with unit vector $\hat{\mathbf{y}}$ where $\hat{\mathbf{x}} \cdot \hat{\mathbf{y}} = 0$..

Such an array has a reduced number of individual detecting coils compared to prior art arrays of differential metal-detecting coils, and is therefore cheaper and

15 less complex than such prior art arrays whilst simultaneously being capable of yielding the same level of positional information regarding metal objects passing the array, or past which the array is moved.

Embodiments of the invention are described below by way of example only and with reference to the accompanying drawings in which:

- Figure 1 shows a plan view of an apparatus of the invention;
- 5 Figure 2 shows in detail a metal-detecting receiver coil of the Figure 1 apparatus;
- Figure 3 shows graphs of voltage against time for EMFs induced the Figure 2 coil when metal objects move past the coil;
- Figure 4 shows electronic processing hardware comprised in the Figure 1
10 apparatus;
- Figure 5 shows a software flow diagram illustrating processing steps implemented in software by the Figure 4 hardware;
- Figure 6 shows two possible arrangements of a differential metal-detecting
15 coil for two other embodiments of the invention;
- Figures 6A, 6B indicate the arrangement of adjacent metal-detecting coils corresponding to the Figure 6 configurations; and
- 20 Figure 7 shows two possible arrangements of a differential metal-detecting coil for two further embodiments of the invention.

Figure 1 shows a plan view of an apparatus of the invention, for separating metal objects from a mixed input stream of both metal and non-metal objects, indicated
25 generally by 10. The apparatus 10 comprises a conveyor belt 11, operable to carry material 11A, such as unsorted household waste, in the plane of the

conveyor belt 11 in a direction 12 having a unit vector \hat{a} towards and past a series of substantially identical metal-detecting receiver coils 14A, 14B, 14C, 14D which are arranged across the width of the conveyor belt 11 and are positioned below the belt 11 to form a linear metal-detector array. The apparatus 10 further

5 comprises electronic processing hardware (not shown in Figure 1 but shown in Figure 4) for processing signals from the metal-detector array and generating appropriate control signals corresponding to positions of metal objects on the conveyor 11. The apparatus 10 may further comprise rejection means (not shown) for effecting rejection of the metal objects from the mixed input stream in

10 response to the control signals if it is desired to additionally carry out rejection/extraction of metal objects whose position in the input stream has been established. A direction normal to \hat{a} is indicated in Figure 1 by a unit vector \hat{c} in the plane of the belt 11. The component B_p of B in the plane of the belt 11 is in a direction having unit vector \hat{b} (i.e. $B_p = B_p \hat{b}$).

15

Figure 2 shows receiver coil 14A in detail. The receiver coil 14A comprises two square coil portions 15, 16 of side s , one 15 of which is displaced with respect to the other 16 by a displacement B . The component of B in the plane of the conveyor belt 11 is $B_p (= B_p \hat{b})$. The coil portion 15 is displaced from the coil

20 portion 16 in the \hat{a} direction by a distance $s+x$, where $x=s/4$, and by a distance s in the \hat{c} direction, i.e. $B_p \cdot \hat{a} = s + x = 5s/4$ and $B_p \cdot \hat{c} = s$. The two coil portions 15, 16 of the coil 14A are wound in opposite senses to form a differential coil. In this example apparatus 10, the receiver coils 14A, 14B, 14C, 14D are each formed by metal tracks on a printed circuit board (PCB) and the turns of the coils

25 are in the surface plane of the PCB. Multi-layer PCBs with spiral tracks on each

layer may be used to increase the number of turns for a given coil portion area, as shown, for example, in US patent number 6 429 763. As a further step of integration, all of the receiver coils 14A, 14B, 14C, 14D and all electronic processing hardware of the apparatus 10 may be co-located on a single PCB for simplicity and ease of construction.

Referring again to Figure 1, the apparatus 10 further comprises a transmitter coil 13 (positioned below the conveyor belt 11 and around the detecting coils 14A, 14B, 14C, 14D) and an oscillator 13A for generating a time-varying transmitted magnetic field in the region of the coils 14A, 14B, 14C, 14D. Together with the coils 14A, 14B, 14C, 14D, the transmitter coil 13 and the oscillator 13A form a linear array of differential metal-detectors, each of which has a substantially zero response to the transmitted field because EMFs generated in respective coil portions of a receiver coil, such as 14A, have substantially equal magnitude, but opposite polarity. However, the transmitted field induces eddy currents in metal objects on the conveyor belt 11 and near the transmitter coil 13A; magnetic fields associated with these eddy currents are detected by the receiver coils 14A, 14B, 14C, 14D, i.e. EMFs are induced in the receiver coils 14A, 14B, 14C, 14D.

Figure 3 shows graphs 18B, 19B, 20B of voltage against time for EMFs induced in the coil 14A when a metal object is conveyed over it along paths 18A, 19A, 20A respectively, as shown in Figure 2. If the object passes along paths such as 18A or 19A shown in Figure 2, i.e. directly underneath one of the coil portions 15, 16, then an EMF having a corresponding polarity is induced, as shown by graphs 18B and 19B respectively. Signal 19B occurs later in time than signal 18B due to the

displacement of the coil portion 15 in the \hat{a} direction with respect to the coil portion 16. If the object passes along a path such as 20A in Figure 2, the temporal form of the induced EMF is as shown by graph 20B in Figure 3. The peaks of pulses 18B, 19B, and those of graph 20B, have a temporal separation

5 $(s+x)/v$, where v is the velocity of the belt 11. The other receiver coils 14B, 14C, 14D respond to metallic objects moving on the conveyor belt 11 in a similar manner. It will be appreciated that the temporal forms of EMFs induced in the receiver coils give information on the position of the metal object across the width of the conveyor belt 11 (i.e. in the \hat{c} direction.) Although the displacement of the

10 coils portions within a detector coil in the \hat{a} direction may be s (so that the coil portions are contiguous in that direction), in practice an additional displacement x is desirable as this provides a larger temporal displacement between signals arising between coil portions. This allows more accurate positional information to be obtained relating to the position of a metal object in the input stream. A useful

15 range of values for x is $0 < x < \frac{s}{2}$.

Figure 4 schematically illustrates electronic processing hardware 100 comprised in the apparatus 10. The hardware 100 receives signals from the receiver coils 14A, 14B, 14C, 14D, processes them to establish the positions of metal objects

20 on the conveyor belt 11 and provides corresponding control signals for controlling the rejection means of the apparatus 10.

Referring to Figure 4, output signals from the receiver coil 14A are passed to a circuit module 102A. Module 102A comprises a pre-amplifier 104, phase

25 sensitive detectors (PSDs) 106, 107, and analogue-to-digital converters (ADC)

108, 109. Outputs 110A, 111A from ADCs 108, 109 respectively of the module 102A are input to a microprocessor 106. The hardware 100 comprises three further such circuit modules (not shown), associated with receiver coils 14B, 14C, 14D and having outputs 110B, 111B, 110C, 111C, 110D, 111D which are also
5 input to the microprocessor 106.

Signals for the transmitter coil 13 are digitally synthesised by a signal synthesiser 150 which has a first (0°) output 151A connected to the transmitter coil 13 via a digital-to-analogue converter (DAC) 152 and an amplifier 156. The signal
10 synthesiser 13 has a second (90°) output 151B for providing a signal identical to that from the output 151A, except that it is phased-shifted with respect to the signal at 151A by 90° . The 90° output 151B is connected to a DAC 154. Analogue outputs 153A, 155A of the DACs 152, 154 are connected to PSDs 107, 106 respectively within the circuit module 102A. Further analogue outputs 153B,
15 153C, 153D and 155B, 155C, 155D are connected to PSDs such as 107, 106 within circuit modules (not shown) associated with receiver coils 14B, 14C, 14D.

The electronic processing hardware 100 operates as follows. Voltage signals from receiver coil 14A are amplified by pre-amplifier 104 and input to PSDs 106,
20 107. An analogue form of the transmitter signal is also input to PSD 107, and an analogue transmitter signal phase-shifted by 90° is also input to PSD 106, for use as reference pulses. Signals output from the PSDs 106, 107 correspond respectively to the imaginary and real parts of the signal received from coil 14A, and are digitised by ADCs 108, 109 and passed to the microprocessor 106.
25 Digital output signals from circuit modules associated with the receiver coils 14B, 14C, 14D are also passed to the microprocessor 106.

Figure 5 shows a software block-diagram illustrating processing of signals received from circuit modules, such as 102A, associated with each of the receiver coils 14A, 14B, 14C, 14D, within the microprocessor 106. Two digital output signals from the ADCs within a circuit module associated with a particular receiver coil are first read (202) and then decimated (204) to produce a signal of reduced bandwidth.

Each digital signal has an unwanted dc offset due to slight imbalance between the coil portions of a given detector coil, as well as inherent offsets in the circuit modules. These are removed with a simple algorithm (206) well-known to those skilled in the art.

Phase correction (208) is then carried out to compensate for phase shifts within the analogue electronics associated with the transmitter coil and within the circuit modules. This is achieved by a calibration procedure (carried out before the apparatus 10 is operated) in which an object of known phase response is placed near each receiver coil in turn. Two signals, orthogonal in phase, are recorded from each circuit modules (e.g. 102A) and a simple rotation matrix can adjust the phase of the calibration signal to any chosen value. A suitable calibration target is non-conducting ferrite, as this has a zero phase response to a transmitted magnetic field.

Predetermined thresholds (21A, 21B in Figure 3) are compared to the signal to determine whether the signal is stronger than a threshold. The thresholds 21A, 21B are set so that noise, and metal objects too small to be of interest, are rejected (210).

The phase of the signal from the receiver coil with respect to the transmitted signal is then established (212); this may be used identify the particular metal involved. A known algorithm (214) then establishes whether the metal is ferrous or non-ferrous. A fitting algorithm (216) may then used to establish the position of
5 a metal object across the width of the conveyor belt 11 to a greater precision than the separation of coil portions in the \hat{c} direction. Data generated by the microprocessor 106 regarding the nature and position of metal objects on the conveyor belt 11 is time-stamped (218) and may be passed to rejection means to effect separation of metal objects in the input stream on the conveyor belt 11.

10

Signals output from each of the receiver coils 14A, 14B, 14C, 14D are processed in a common manner.

Although the apparatus 10 comprises a transmitter coil, this is not essential in all
15 circumstances. For example, if it is desired to only to extract ferrous objects from the input stream, this may be achieved by subjecting the input stream to a magnetic field before it enters the apparatus 10. Magnetised ferrous objects may then induce signals in the receiver coils by virtue of relative movement between the objects and the receiver coils, obviating the need for a transmitter coil. Where
20 a transmitter coil is used, a single coil arranged around all the receiver coils is particularly advantageous in terms of reduced cost and complexity, although the use of individual transmitter coils with the receiver coils is also possible. Where a transmitter coil is used, neither ferrous nor non-ferrous objects need to be moving with respect to the detector coils in order to be detected, although obviously in the
25 processing of a continuous input stream this is desirable, and it is immaterial

whether the waste stream moving with respect to static detecting coils or whether the detecting coils are moved with respect to a static waste stream.

Although the use of printed circuit boards mentioned above is particularly convenient, it is not essential. The differential receiver coils may be formed in a more conventional manner by winding wire onto one or more formers.

In a variant of the apparatus 10, the coil portion 15 is offset with respect to the coil portion 16 by a distance $s+x$ ($x=s/4$) in the \hat{a} direction, and also by a distance $s/2$ in the \hat{c} direction, and remaining detector coils of the variant apparatus are similarly arranged. Detector coils in the variant apparatus provide a greater spatial resolution ($s/2$) although for a given conveyor belt width, a greater number of individual detector coils is required than is the case in the apparatus 10, in which coil portions are offset in the \hat{c} direction by a distance s .

15

Some of the geometries discussed above are summarised in Table 1 below.

$B_P \cdot \hat{a}$	$B_P \cdot \hat{c}$	$\cos^{-1} \hat{a} \cdot \hat{b}$
s	s	45.0°
s	$s/2$	26.5°
$5s/4$	s	38.6°
$5s/4$	$s/2$	21.8°
$3s/2$	s	33.7°
$3s/2$	$s/2$	18.4°

Table 1

In other embodiments of the invention, the coil portions of the differential receiver coils may have shapes other than square. Figure 6 indicates two possible arrangements of circular coil portions of a differential receiver coil in which $\mathbf{B}_p \cdot \hat{\mathbf{c}}$ equals D or $D/2$ (D is the diameter of a circular coil portion.) Figures 6A and 6B show how consecutive detectors coils would be arranged in the first and second of these cases respectively. Figures 7 illustrates two possible arrangements for differential receiver coil having elliptical coil portions.

Generally, in embodiments of the invention, the coil portions of a differential receiver coil need to be of generally similar size and shape, and provided $0 < \cos^{-1} \hat{\mathbf{a}} \cdot \hat{\mathbf{b}} < \frac{\pi}{2}$ the benefits of the invention are achieved, i.e. even if the coil portions of respective receiver coils overlap in a plane parallel to that of the conveyor belt 11. However it is preferable that \mathbf{B} is such that $\mathbf{B} \cdot \hat{\mathbf{c}}$ is either s or $s/2$, where s is the approximate dimension of a coil portion in the $\hat{\mathbf{c}}$ direction, and simultaneously $\mathbf{B} \cdot \hat{\mathbf{a}} > t$, where t is the approximate dimension of a coil portion in the $\hat{\mathbf{a}}$ direction, as this simultaneously provides a significant detecting width across the conveyor belt and an output signal from which the position of a metal object across the belt 11 can be accurately obtained.

Also it will be appreciated that the planes of the coil portions of a receiver coil must be arranged so that there is flux linkage sufficient to generate a useful signal in the receiver coil when a metal object is conveyed past it. For example, if it is desired to detect and separate ferrous objects only, these objects may be magnetised in a direction normal to the plane of Figure 1, prior to their passage

past the detector array; the planes of the coil portions of the receiver coils are then preferably substantially parallel to the plane of the conveyor belt 11.

5 The detector array may also be positioned above the conveyor belt 11, rather than below it, although in that case it would need to be ensured that the spacing between the belt 11 and the array was sufficient to allow the passage of objects comprised in the input stream.

10 Although the foregoing description relates to CW metal-detection, other embodiments of the invention may employ pulse-induction detection. In such embodiments, the metal-detecting coils would have the same configuration but the electronic processing hardware would be adapted to this other method of metal-detection.

CLAIMS

1. Apparatus (10) for establishing the positions of metal objects in a mixed input stream of both metal and non-metal objects, the apparatus comprising a differential metal-detecting coil (14A) having a first coil portion (15) wound in a first sense and a second coil portion (16) of generally similar shape and size to the first, wound in a second sense opposite to the first sense, and conveying means (11) for moving objects with respect to, and past, the differential metal-detecting coil in a plane and in a direction with unit vector \hat{a} , characterised in that the second coil portion is displaced from the first coil portion by a displacement B having a component in the plane in a direction with unit vector \hat{b} , wherein $0 < \cos^{-1} \hat{a} \cdot \hat{b} < \pi/2$, and in that the apparatus further comprises analysing means (100) for analysing the form of the output voltage of the coil as a function of time to establish the position of said metal objects in a direction \hat{c} in the plane, where \hat{c} is defined by $\hat{a} \cdot \hat{c} = 0$.

2. Apparatus according to claim 1 wherein $B \cdot \hat{a} \geq t$, where t is the dimension of a coil portion in the \hat{a} direction, and $\frac{s}{2} \leq B \cdot \hat{c} \leq s$, where s is the dimension of a coil portion in a direction with unit vector \hat{c} defined by $\hat{a} \cdot \hat{c} = 0$.

3. Apparatus according to claim 1 or claim 2 wherein the analysing means comprises means for identifying voltages of different polarities, and for ascribing voltages of a first polarity to one coil portion and voltages of a second polarity, opposite to the first, to the other coil portion.

4. Apparatus according to any preceding claim and comprising a plurality of differential metal-detecting coils arranged in a linear array substantially in the \hat{c} direction.
- 5 5. Apparatus according to claim 4 and further comprising a single transmitter coil (13) arranged around the differential metal-detecting coils.
6. Apparatus according to claims 4 wherein the differential metal-detecting coils are each formed on a printed circuit board (PCB).
- 10 7. Apparatus according to claim 6 wherein the differential metal-detecting coils are formed on a single PCB.
8. Apparatus according to claim 7 wherein a single transmitter coil is formed on
- 15 the PCB around the differential metal-detecting coils.
9. Apparatus according to claim 8 wherein the analysing means comprises electronic hardware co-located with said coils on the single PCB.
- 20 10. Apparatus for establishing the positions of metal objects in a mixed input stream of both metal and non-metal objects, the apparatus being substantially as hereinbefore described and illustrated in Figures 1, 2, 4 and 5.

11. Apparatus for establishing the positions of metal objects in a mixed input stream of both metal and non-metal objects, the apparatus being substantially as hereinbefore described and illustrated in Figures 1, 4, 5 and 6.

5 12. Apparatus for establishing the positions of metal objects in a mixed input stream of both metal and non-metal objects, the apparatus being substantially as hereinbefore described and illustrated in Figures 1, 4, 5 and 7.

13. A method of establishing the positions of metal objects in a mixed input
10 stream of both metal and non-metal objects, characterised in that the method comprises use of apparatus according to any preceding claim.

14. A metal-detector array system comprising a plurality of differential metal-
detecting coils, the array extending in a direction with unit vector \hat{x} , and each
15 metal-detector coil having a first coil portion (15) wound in a first sense and a
second coil portion (16) of generally similar shape and size to the first, wound in a
second sense opposite to the first sense, characterised in that, in at least one
metal-detector coil, the second coil portion thereof is displaced from the first coil
portion thereof by a displacement \mathbf{B} such that the two coil portions are
20 substantially in the same plane and $0 < \cos^{-1} \hat{\mathbf{b}} \cdot \hat{\mathbf{x}} < \pi/2$ where $\hat{\mathbf{b}}$ is a unit vector
defined by $\mathbf{B} \cdot \hat{\mathbf{b}} = |\mathbf{B}|$, and in that the system further comprises, in respect of that
or those metal-detector coil or coils, analysing means for analysing the form of
the output voltage of the coil or coils as a function of time to establish the position,
along the direction \hat{x} , of metal objects when said objects are moving past the
25 array substantially in a direction with unit vector \hat{y} where $\hat{x} \cdot \hat{y} = 0$.

ABSTRACT


APPARATUS FOR ESTABLISHING THE POSITIONS OF METAL OBJECTS IN AN INPUT STREAM

Apparatus (10) for establishing the positions of metal objects in a mixed input stream of both metal and non-metal objects, the apparatus comprising a differential metal-detecting coil (14A) having a first coil portion wound in a first sense and a second coil portion of generally similar shape and size to the first, wound in a second sense opposite to the first sense, and conveying means (11) for moving objects with respect to, and past, the differential metal-detecting coil in a plane and in a direction with unit vector \hat{a} , characterised in that the second coil portion is displaced from the first coil portion by a displacement \mathbf{B} having a component in the plane in a direction with unit vector \hat{b} , wherein $0 < \cos^{-1} \hat{a} \cdot \hat{b} < \pi/2$, and in that the apparatus further comprises analysing means for analysing the form of the output voltage of the coil as a function of time to establish the position of said metal objects in a direction \hat{c} in the plane, where \hat{c} is defined by $\hat{a} \cdot \hat{c} = 0$.


Figure 1 should accompany the abstract.

1/7

FIG. 8

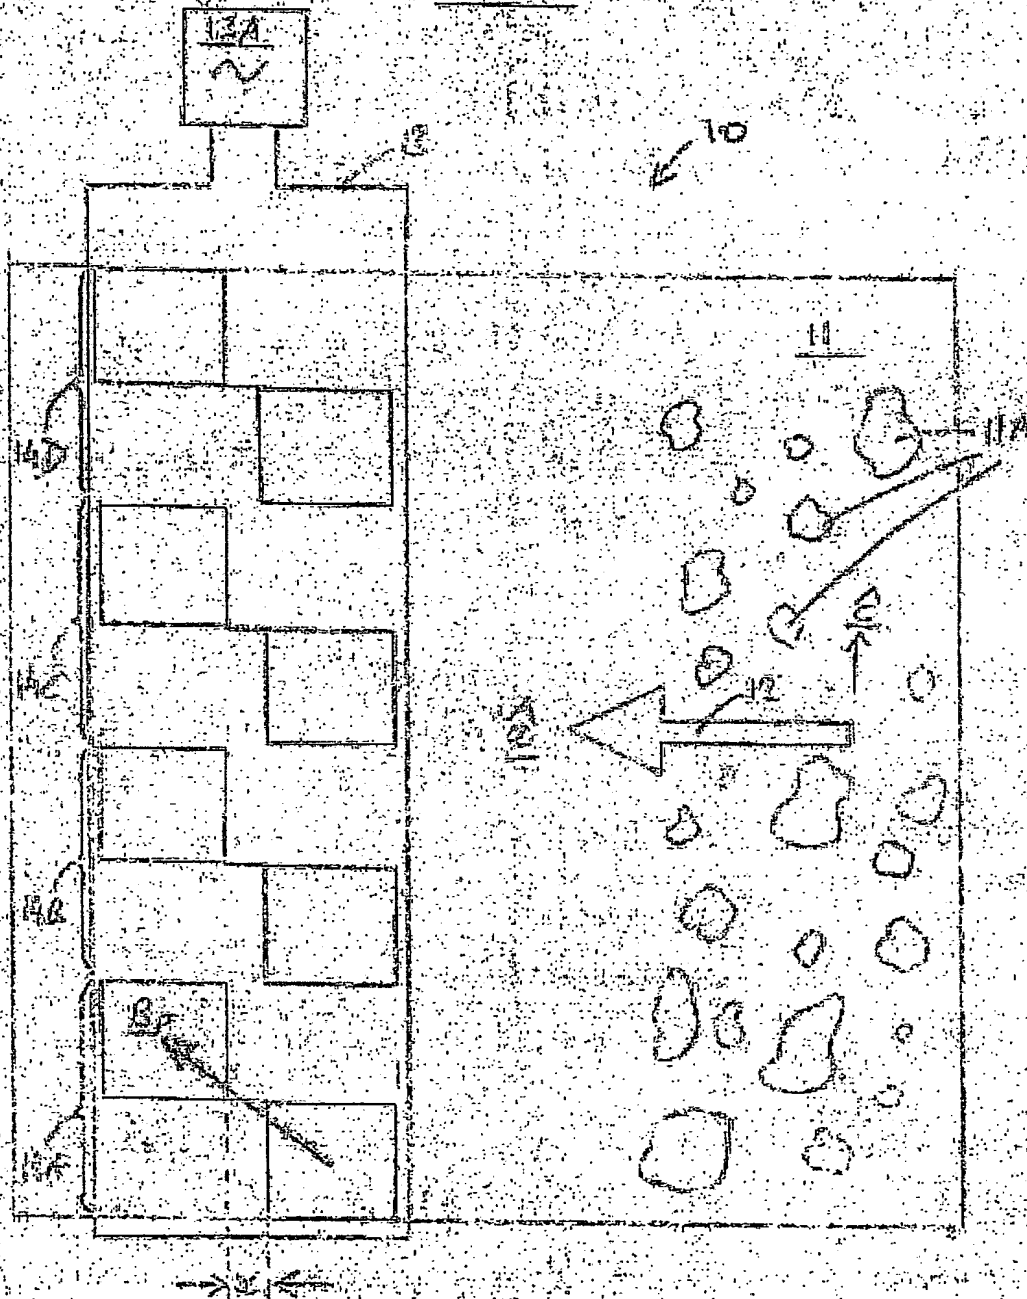

100

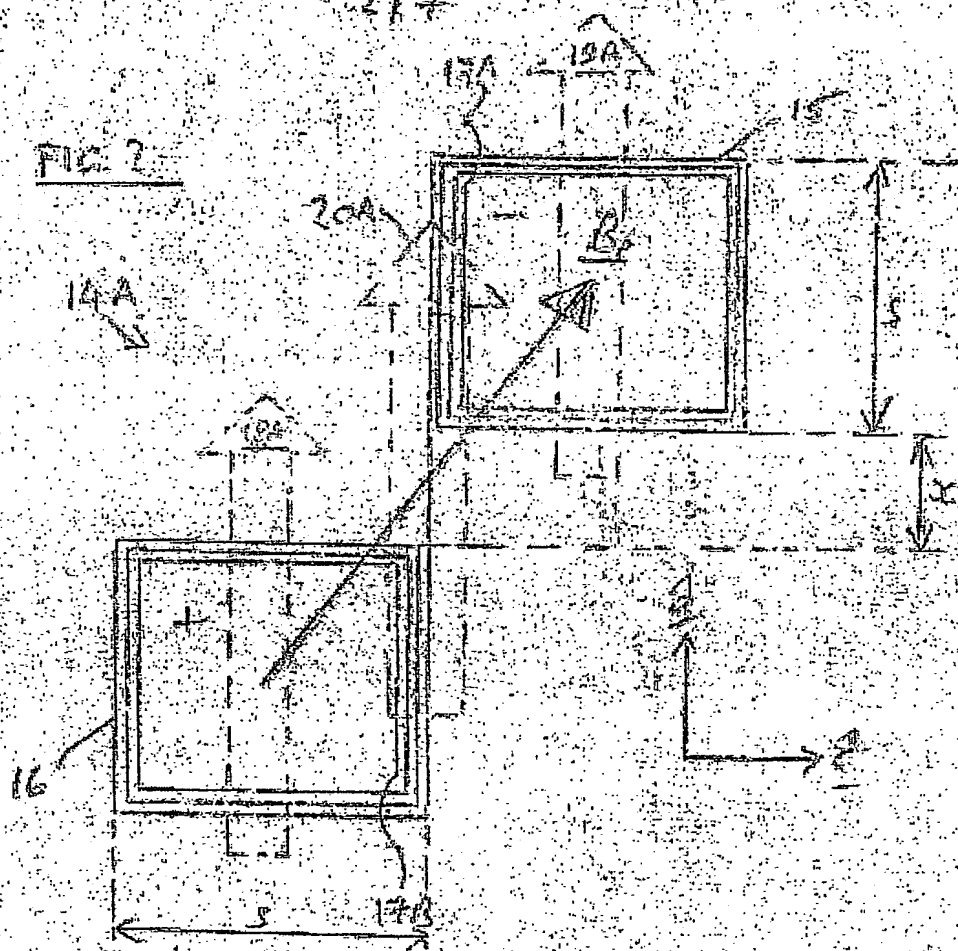

3/7

FIG. 3


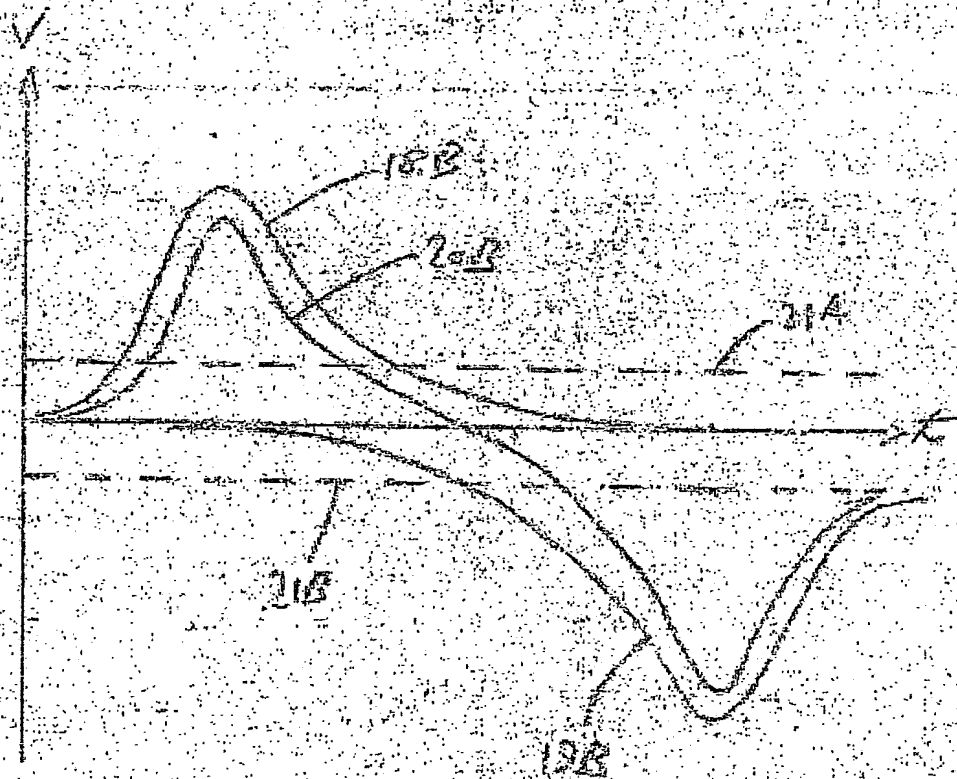



FIG. 4

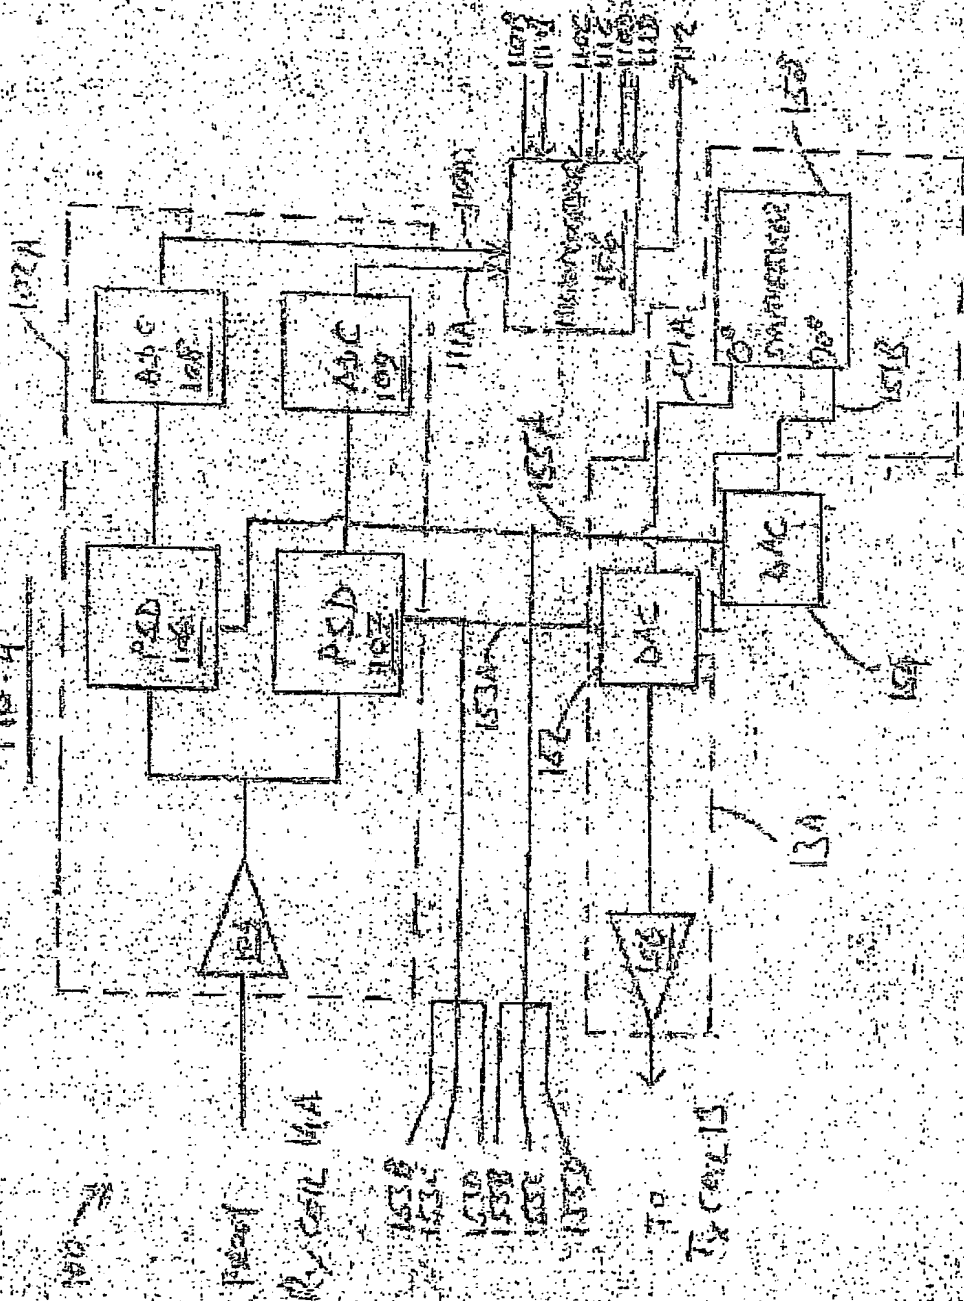


4/7

5/7

FIG. 5

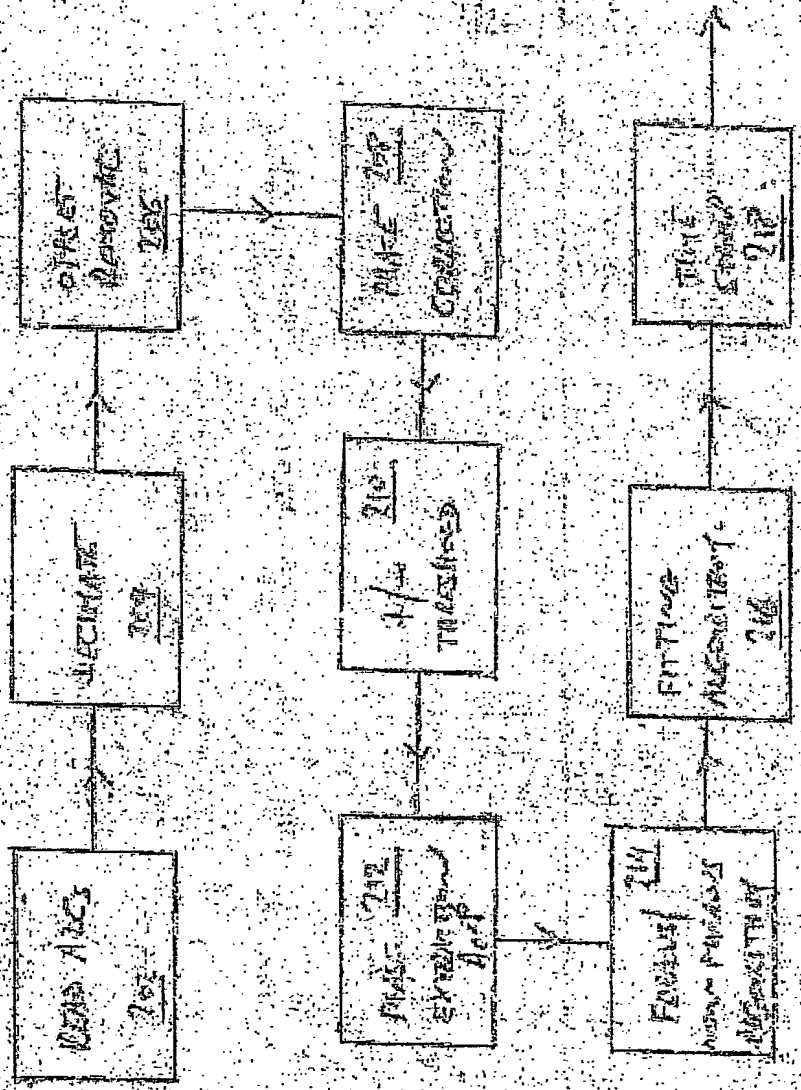

67

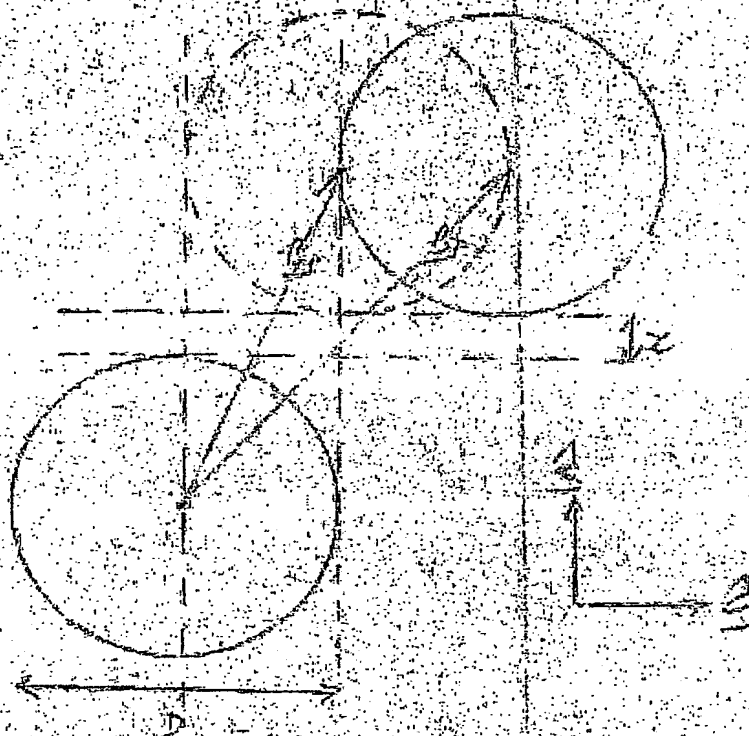


1234

FILE 6A



Feb 5/5



7/7

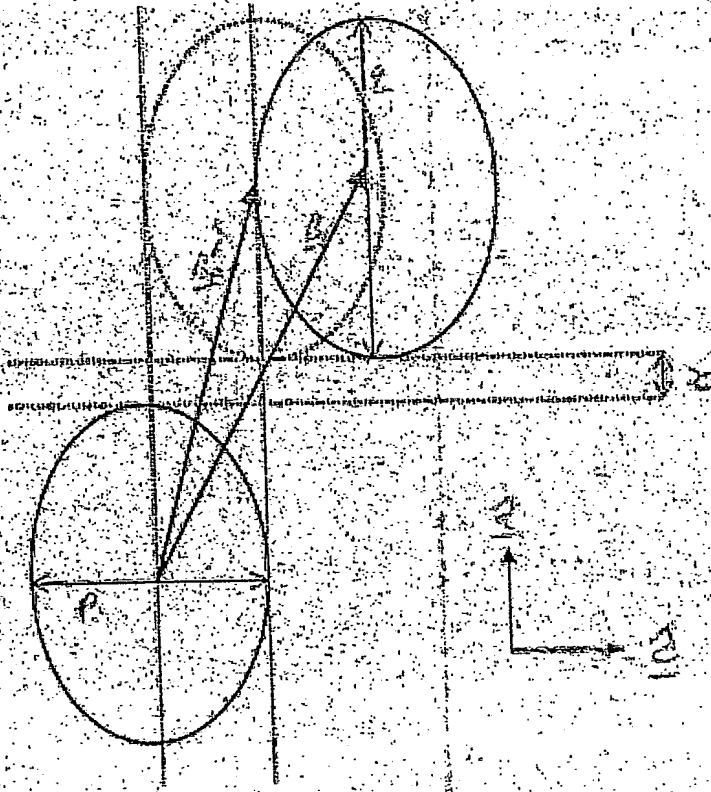


FIG. 7

PCT/GB2004/003953



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.